

# Metro Power Cabinet Wide Temperature Range Operation Guide



## Overview

---

All Metro Catalog Sheets are available on our Web Site: [www](http://www). To change temperature set point, turn the control knob. About 3 seconds after the knob is turned to the set point, press and release the "Low Temp Alarm" button. Do not use the cabinet and plastic drip pan binet, responsible for filing freight damage claims. This equipment must be. How do I turn on and operate the Metro DataVac C5 1 Series Heater?

Refer to the DATA PLATE for electrical requirements. 2000 watt cabinets require a 20 amp individual circuit and receptacle. • Fixed Wire: Fixed slides hold 18"x26" sheet, 12"x20" steam table, 2/1 GN, or 1/1 GN pans on 3" (76mm) increments. Future module upgrades or changes can occur without cabinet body replacement. WARNING: Follow all food safety guidelines.

## Metro Power Cabinet Wide Temperature Range Operation Guide




### 8 SERIES CONTROLLED TEMPERATURE HEATED HOLDING ...

To clean cabinet, turn power of, unplug from wall outlet, allow the cabinet to cool, remove the floor duct and pan, wipe the cabinet with a damp cloth and dry with a towel. Consult the instructions for use for ...

### C5 E-SERIES HEATED HOLDING & PROOFING CABINETS

Heated holding mode (selector switch set to "hold") Set thermostat at desired setting in red holding range, number 7 is approximately 150°F (66°C), 10 is approximately 190°F (88°C). Monitor ...

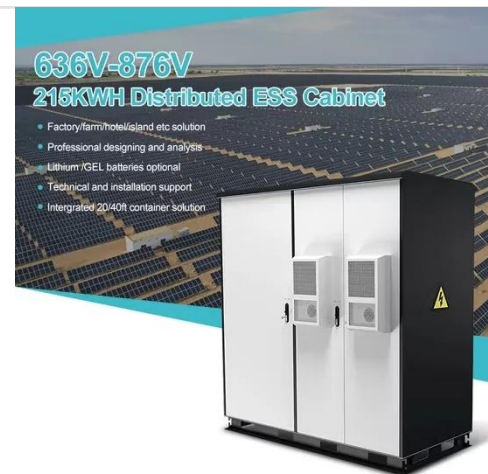

Standard 20ft containers



Standard 40ft containers

### 8 Series Controlled Temperature Heated Holding Cabinets

As the knob is turned, the temperature display will show the changing temperature set point, and the "°F and °C" indicator lamps will blink. About 3 seconds after the knob is turned, the display will show the ...

## METRO DATAVAC C5 1 SERIES USER MANUAL Pdf Download

When the power switch is on, the blower is always energized, circulating air, and the digital thermometer displays the cabinet temperature. When the thermostat senses heat is required, the appropriate ...



## Metro C5-5RDGCSTR, C5 1 User Manual

o Combination Module: 2000 Watt, 120 Volts, 60 Hz., single phase, 16.7 Amps. 80°F to 190°F operating temperature range. 95% RH at 95°F. NEMA 5-20P plug. o Holding Module: 2000 Watt, 120 Volts, 60 ...

## METRO DATAVAC C5 INSTRUCTIONS FOR USE MANUAL Pdf ...

To insure food safety, the C5 cabinet uses Temperature Priority. This feature is designed to minimize the time required to pre-heat a cold cabinet to the desired operating temperature and to recover to the ...



## 6 SERIES CONTROLLED

## TEMPERATURE HEATED HOLDING ...



6 SERIES CONTROLLED TEMPERATURE HEATED HOLDING CABINETS Metro Heated Cabinets are for Hot Food Holding applications only s confirm the rating listed on rear cabinet data plate.

...

---

## INSTRUCTIONS FOR USE

After changing the jumper, replace the top, plug the cabinet in, turn the cabinet on and adjust the temperature and low temperature alarm settings for the new units (°C or °F) of temperature selected.

...



---

## L01-459\_Rev B

When cabinet is unplugged the system begins operation on battery power. Temperature monitoring and air circulation continues up to (3 hours) after the cabinet is un-plugged.



---

## Contact Us

For catalog requests, pricing, or partnerships, please visit:  
<https://www.kidsandparents.pl>

